



LedOK Kit Phone APP

Instructions

Version: V.1.0

Statement

Dear user friend , thanks for choosing Shanghai Xixun Electronic Technology Co., Ltd. (hereinafter referred to as Xixun Technology) as your LED advertising equipment control system. The main purpose of this document is to help you quickly understand and use the product. We strive to be precise and reliable when writing the document , and the content may be modified or changed at any time without notice.

Copyright

The copyright of this document belongs to Xixun Technology. Without the written permission of our company , no unit or individual may copy or extract the content of this article in any form.

Trademark



is a registered trademark of Xixun Technology.

Update

No	Version	Update	Revise
1	Ver.1.0	Initial Publish	2020.12.14

Documets are subject to change without prior notice.

Shanghai Xixun Electronics Co., Ltd

Catalog


Connection.....	1
AP Configuration.....	1
Network Connection.....	2
Add New Program And Send.....	4
End.....	8

Shanghai Xixun Electronics Co., Ltd


Connection

AP Configuration

Put the switch code to AP position and waiting for AP hotspot .

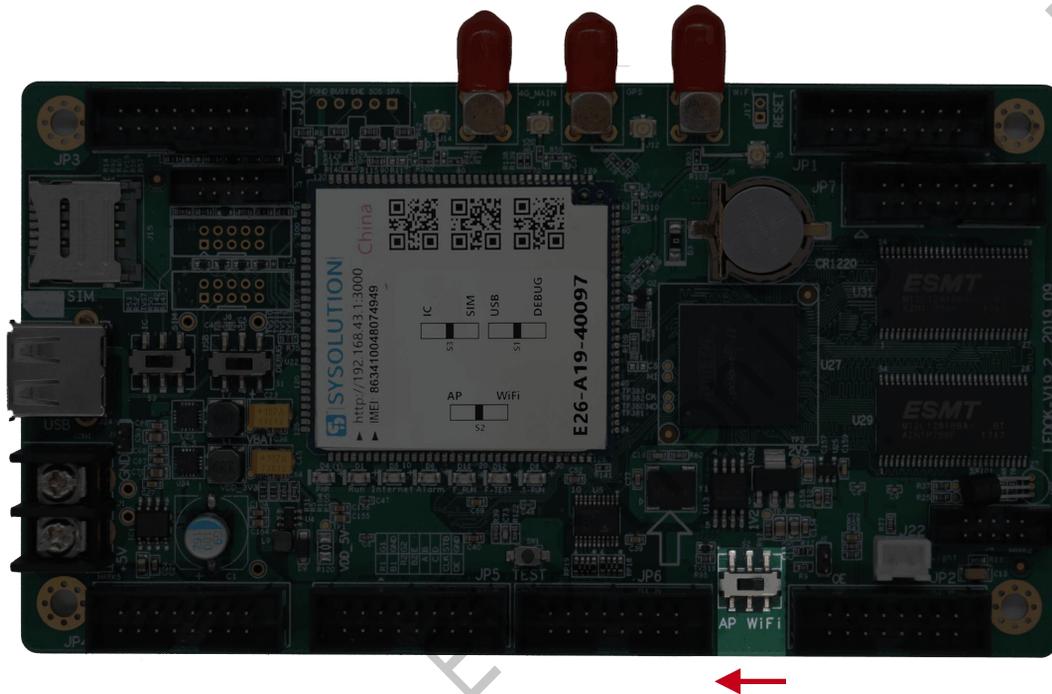


Enter mobile phone' s network settings and enable WLAN, find the controller AP hotspot in the format of E26-xxx-xxxx, click connect, default password is 12345678


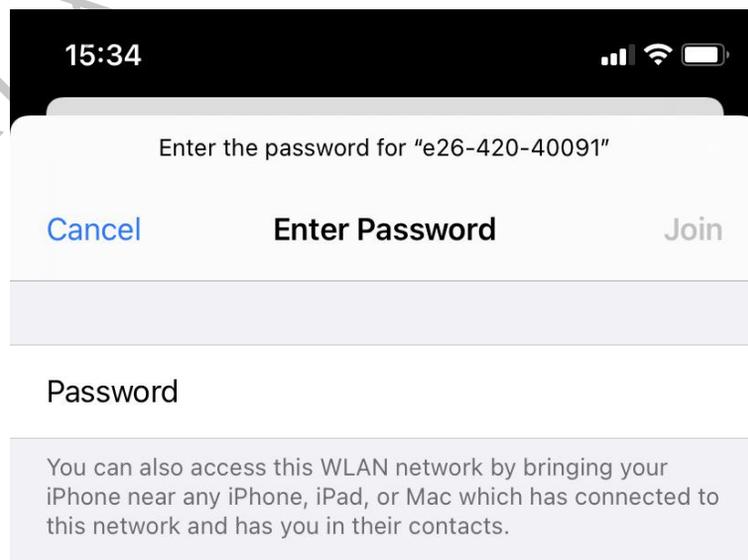


Network Connection

Put the switch code to AP position and waiting for AP hotspot .

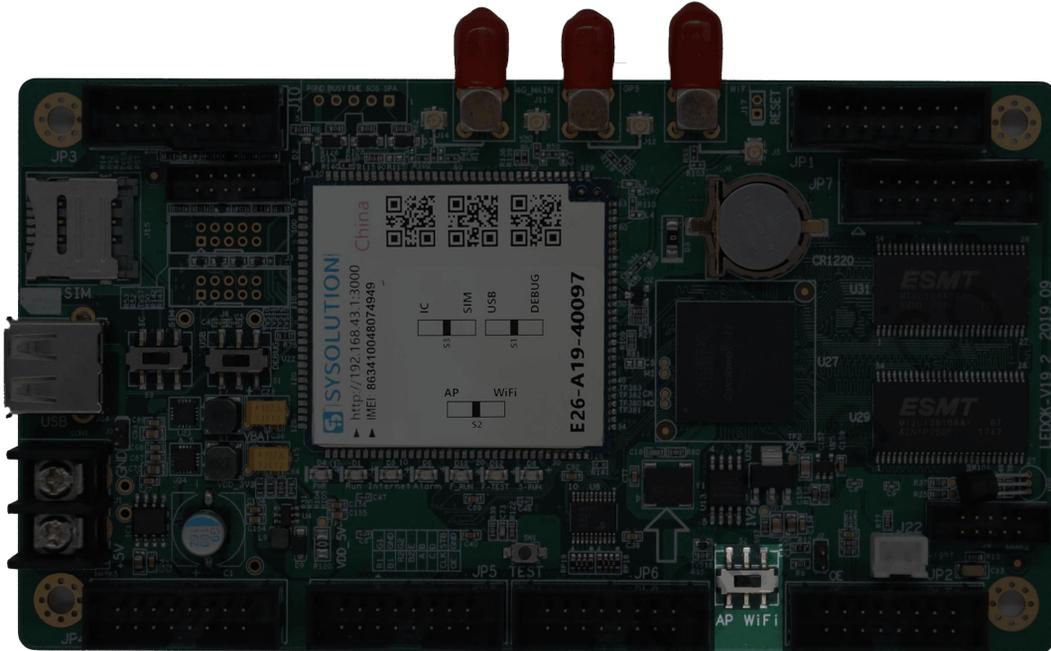


Computer or laptop connect to controller AP hotspot, default password is 12345678

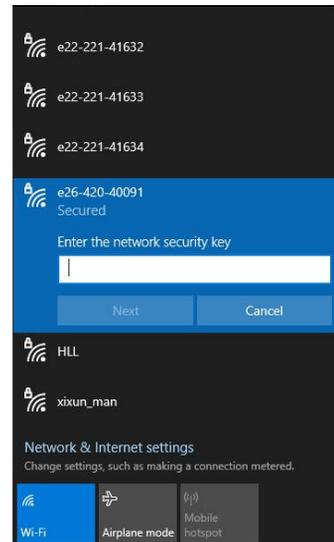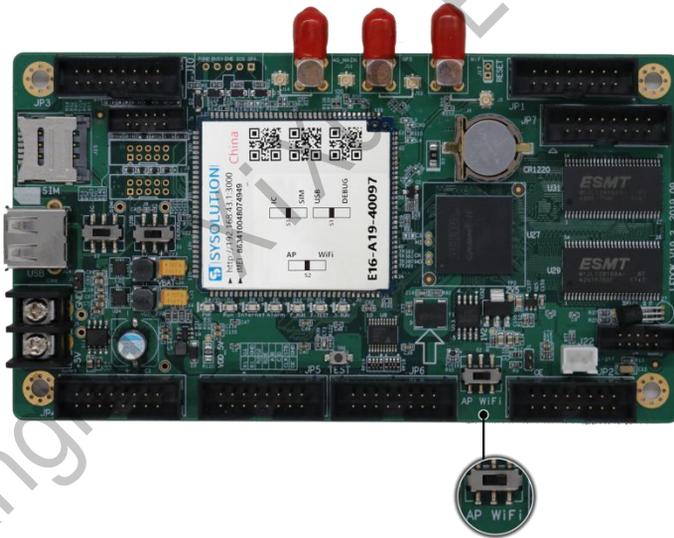

Open LEDOK, enter network configuration interface.

Select controller id, enable WiFi and waiting for 3 seconds, then click scan wifi and select the correct WiFi name and input wifi password, click save.

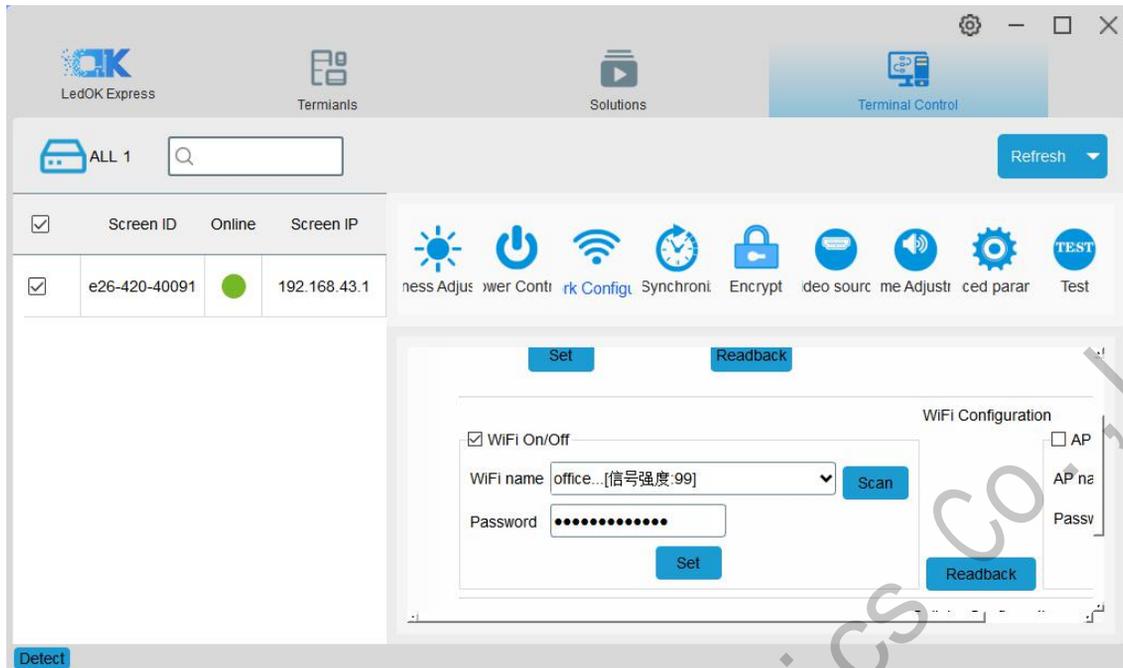

When mobile phone connects to the same WiFi , will auto detect controller by APP.


Tips:

If controller WiFi not work, please check following:

- a. Please check WIFI antenna connection, make sure it fixed.
- b. Please double check WIFI password.
- c. Please check if the WiFi router has any limit, like limit of access devices numbers, firewall,etc.
- d. Please check switch code on WiFi postion.
- e. Please try different WiFi hotspot .

Add New Program And Send


Select controller ID in terminal list.

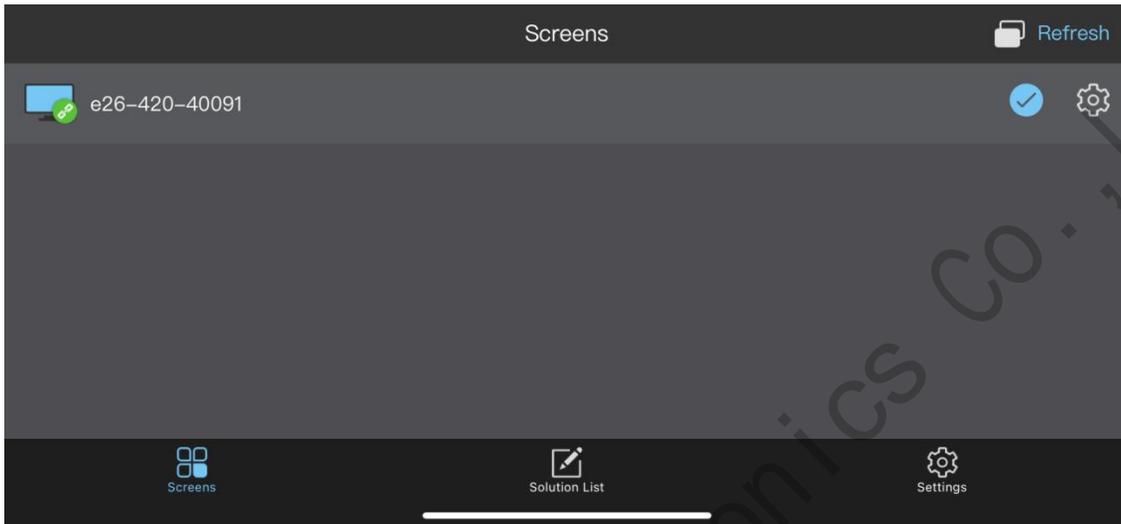


Click solution list and choose to add new program.




Set the program name, resolution, then use the existed templates or customized, click ok.

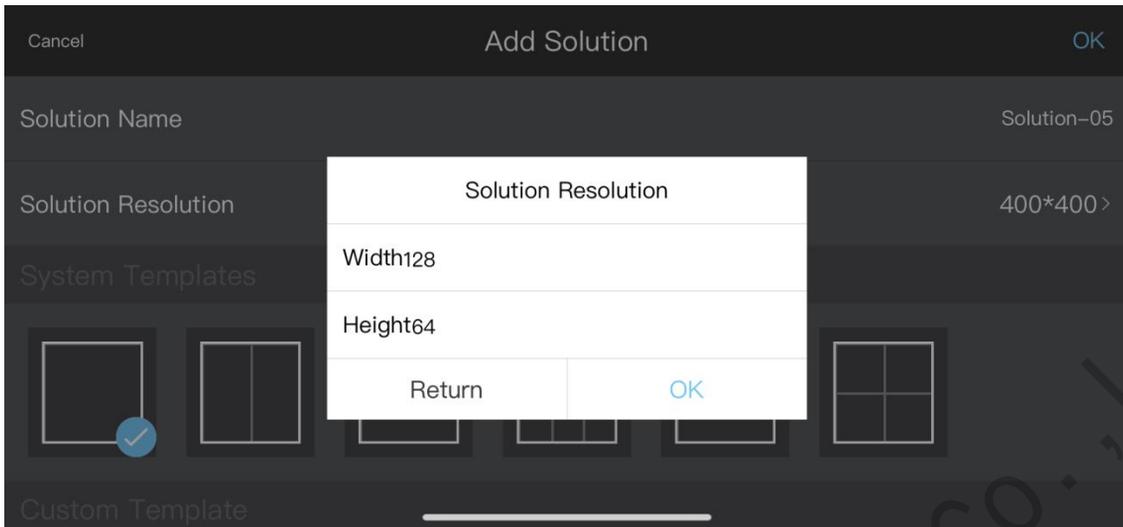


Click the templates.

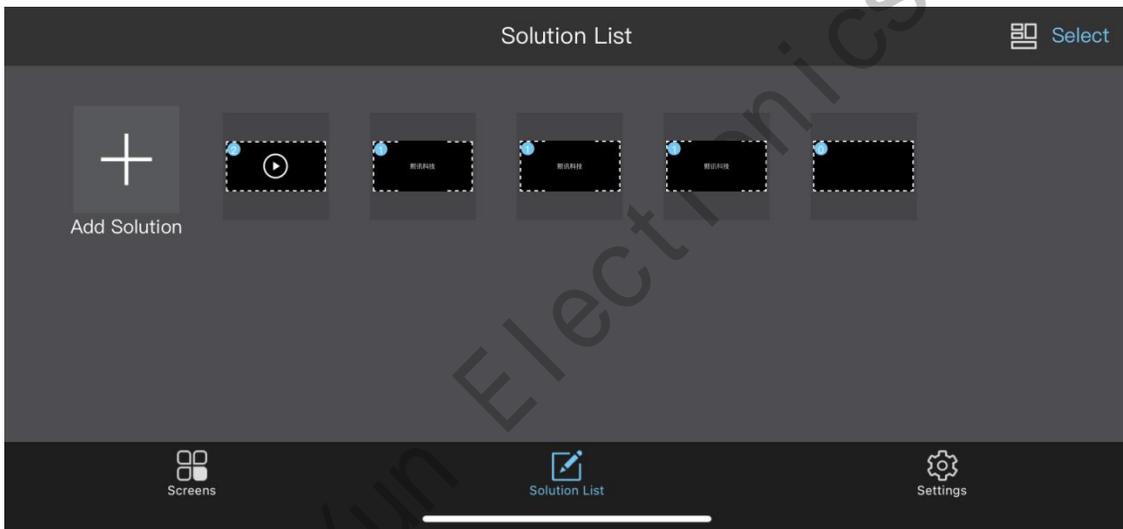


Continue to click to add new window.

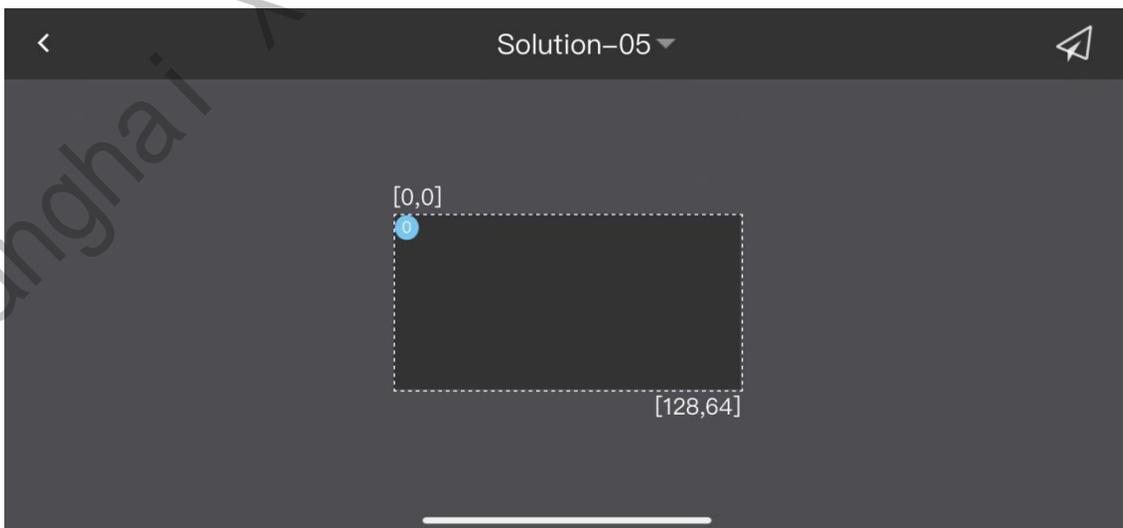

Window1, can add media, like image, video, single line text, multi-line text.

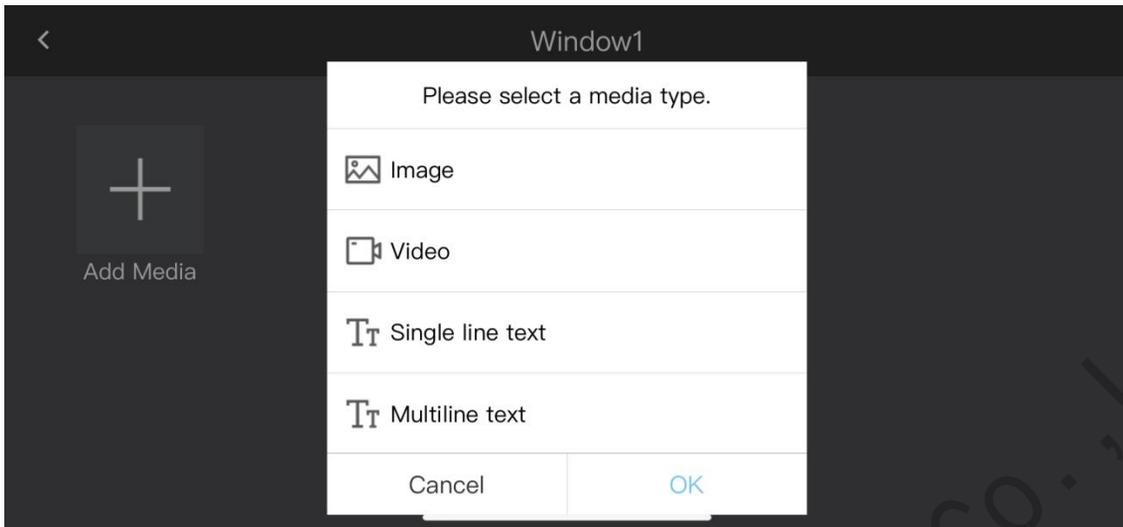

Choose single line text and edit the content, display duration and effects.

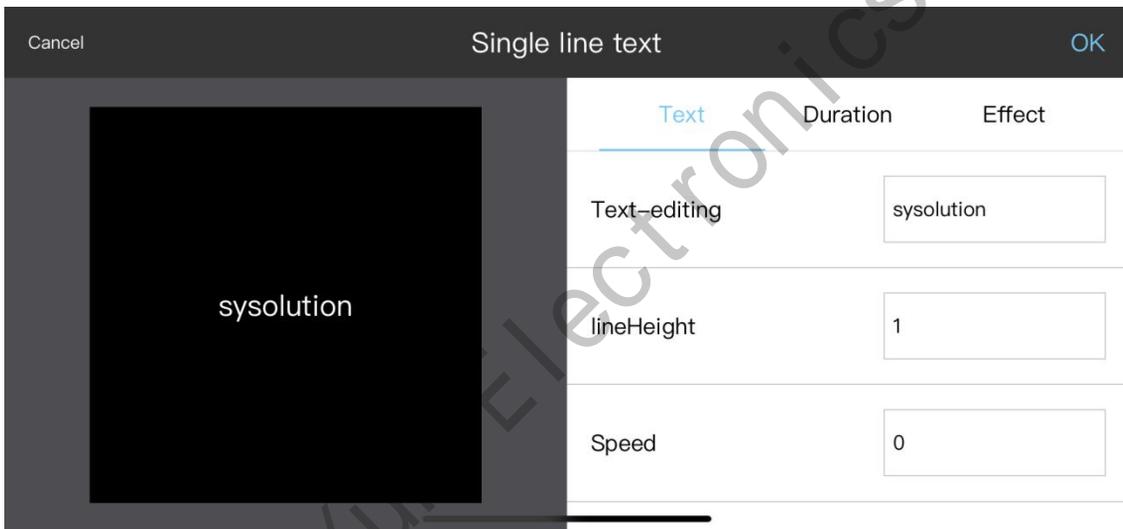

After that back to the solution and click the send button the right top, when process achieve 100% means send success.



Shanghai Xixun Electronics Co., Ltd

End

More about LED advertising equipment control of the Internet cluster control solutions, and related instruction documents, please visit our website www.ledok.cn to detailed information, if necessary, online customer service will make the communication with you, more than 10 years of industry experience will give you a satisfactory answer, Shanghai XiXun- sincerely look forward to the follow-up of cooperation with you.

Best Regards

Shanghai XiXun Electronics Co.,Ltd.

2020-12

让显示屏智慧起来!
We make LED smart